


Q1	1	SEE BELOW	CONTAINER	SYM	DESCRIPTION	DATE	APPROVAL
Q2	1	SEE BELOW	PLUG				

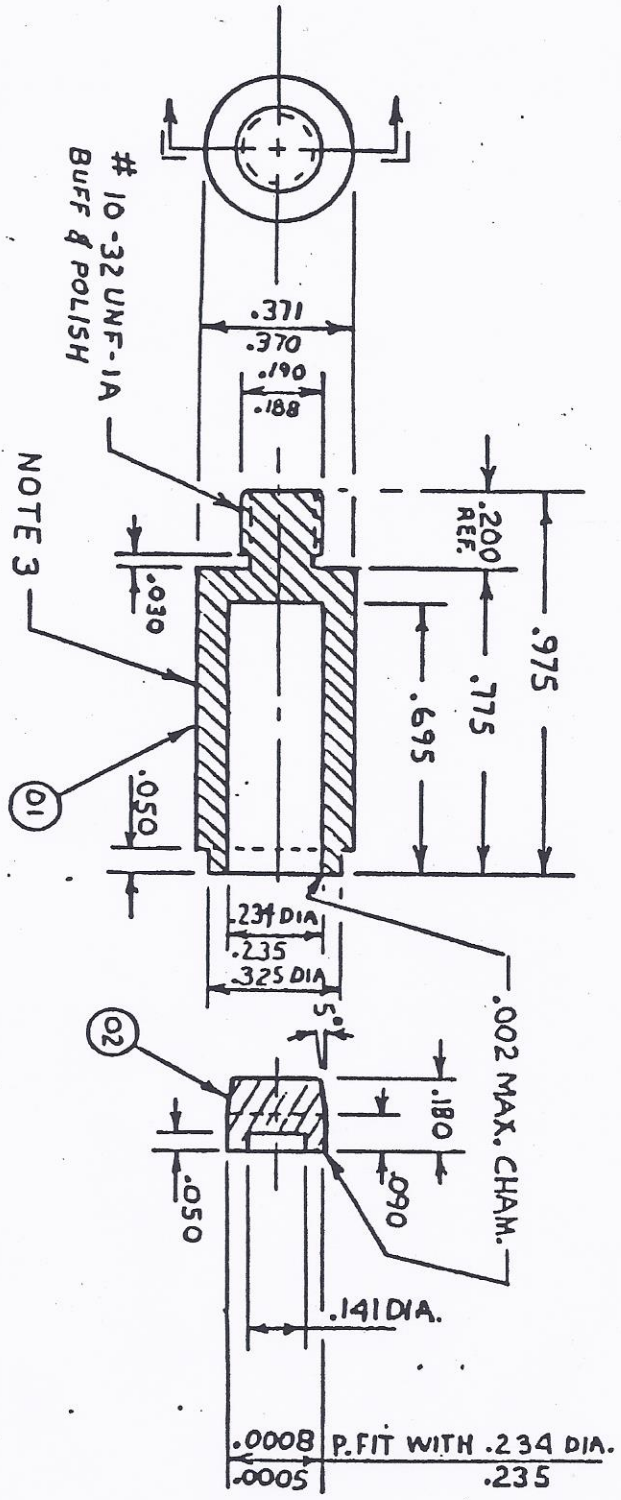

- NOTES:
1. Break all corners .010-.020 unless otherwise specified.
  2. TIG weld. minimum 0.050 weld penetration.
  3. Electroetch, engrave, or imprint identification marking no more than .005 deep on surface indicated.

ALL DIMENSIONS ARE IN X INCHES 11 MILLIMETERS

DIMENSIONS OTHERWISE SPECIFIED		DIMENSIONS OTHERWISE SPECIFIED	
FRACTIONS	FRACTIONS	QA	9/2/82
DECIMALS	DECIMALS	MFG	
ANGLES	ANGLES	DE	
XXX .005	XXX .005	DRAWN	3/8/82
XXX BASIC	XXX BASIC	SIGNATURE	
ALL SURFACES 32/	ALL SURFACES 32/	DATE	9/2/82
MATERIAL 304L S.S. PER	MATERIAL 304L S.S. PER	Standard Neutron Source Model 100S Capsule	
ASTM A 276 OR A 479	ASTM A 276 OR A 479		

FRONTIER TECHNOLOGY CORPORATION  
 Xenia, Ohio, U.S.A.

SCALE	WT. CALC	COUNT IDENT NO	DWG. NO.	SHEET	OF
2 X			A10100-PA02		